



Huron County, MI Coastal Hazard Analysis Flood Risk Review Meeting

April 25, 2018



FEMA

Agenda

- ▶ Introductions
- ▶ Coastal Flood Risk Study and Mapping Program
- ▶ Current Status
- ▶ Technical Overview of Study and Mapping
- ▶ Floodplain Management
- ▶ Next Steps
- ▶ Q&A
- ▶ Workmap Review



FEMA



Huron County, MI

COASTAL FLOOD RISK STUDY AND MAPPING PROGRAM

Great Lakes Flood Study

- ▶ Comprehensive study of the Coastal Great Lakes flood hazards
- ▶ Latest technology, data, and models – including response based modelling concepts

Partners involved:



FEMA



US Army Corps
of Engineers®
Detroit District




U.S. Army Corps of Engineers, Detroit District



FEMA



Response-Based Wave Runup

- ▶ Wave runup is the uprush of water from wave action on a beach, steep bluff or coastal structure.
- ▶ Calculated at each transect using appropriate hydrodynamic equations that simulate events for every time step captured for selected storms using lake-wide gridded record (ADCIRC-SWAN)
- ▶ Statistical analysis is performed on the maximum runup results at each transect to obtain the 1-percent-annual-chance runup elevation.

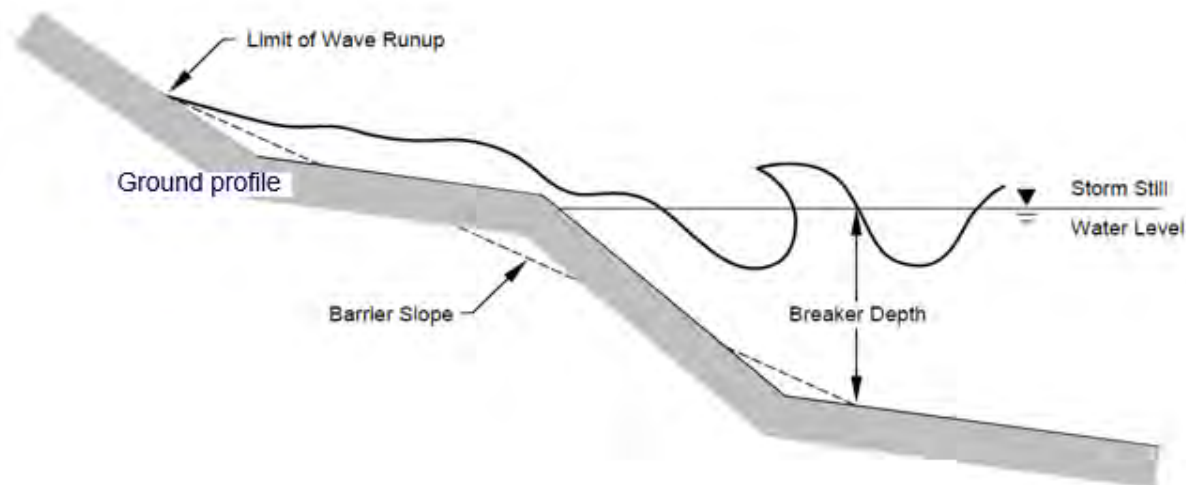

Response-Based Wave Runup

Lorain Transect 19

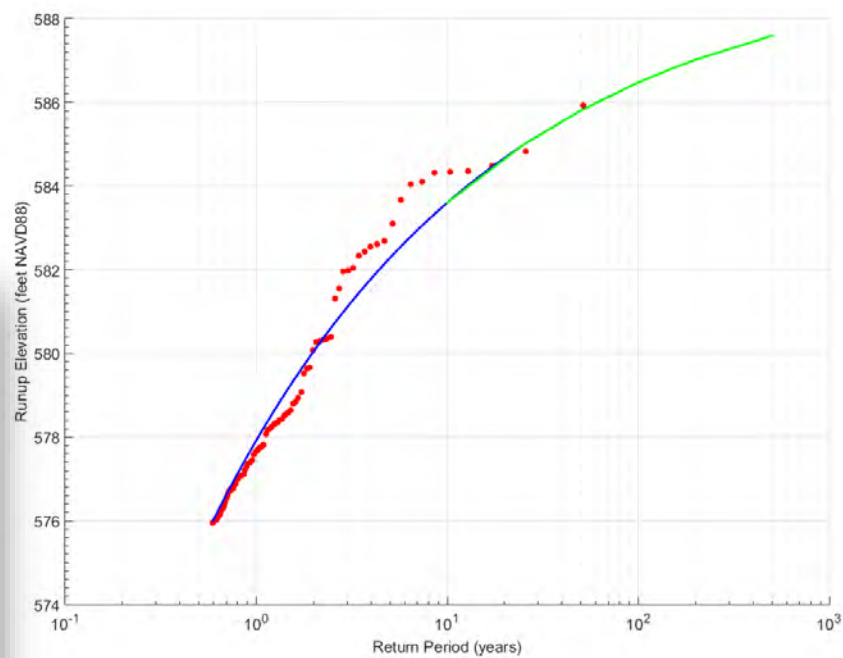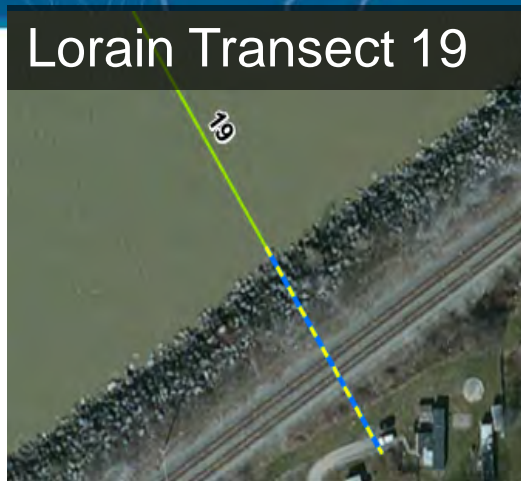

FEMA

FEMA's Risk MAP Program

Risk Mapping, Assessment, and Planning ...

- ▶ Will deliver quality data to **increase public awareness** and **lead to action that reduces risk to life and property**
- ▶ New non-regulatory products and datasets



Mapping Assessment Planning



FEMA

Mitigation Actions: A Shared Responsibility



STRUCTURE AND INFRASTRUCTURE PROJECTS

Acquisition
Elevation
Revetments and Seawalls
Breakwater



LOCAL PLAN AND REGULATIONS

Zoning
Building Codes
Open Space Plan
Lake Front Development Master Plan



CITIZEN AND BUSINESS ENGAGEMENT

Firewise
StormReady
NFIP and CRS



NATURAL SYSTEM PROTECTION

Vegetation management
Wetland restoration
Erosion control



FEMA



Huron County

CURRENT STATUS REVIEW

Analyses/Mapping: Grouping

Blue: Phase 1

- Huron
- Sanilac
- Arenac
- St Clair
- Iosco

Grey: Standalone

- Bay

Green: Phase 2

- Alcona
- Alpena
- Presque Isle
- Cheboygan
- Mackinac

- ▶ Remaining Counties on this map are being finalized and FRR meetings will be in June
- ▶ FRR Meetings fall at the end of a multi-year study including sophisticated modeling
- ▶ Next, the maps and data will be put into the official regulatory format



FEMA


Current Study Status

You are here →



FEMA

Work Map Data Viewer

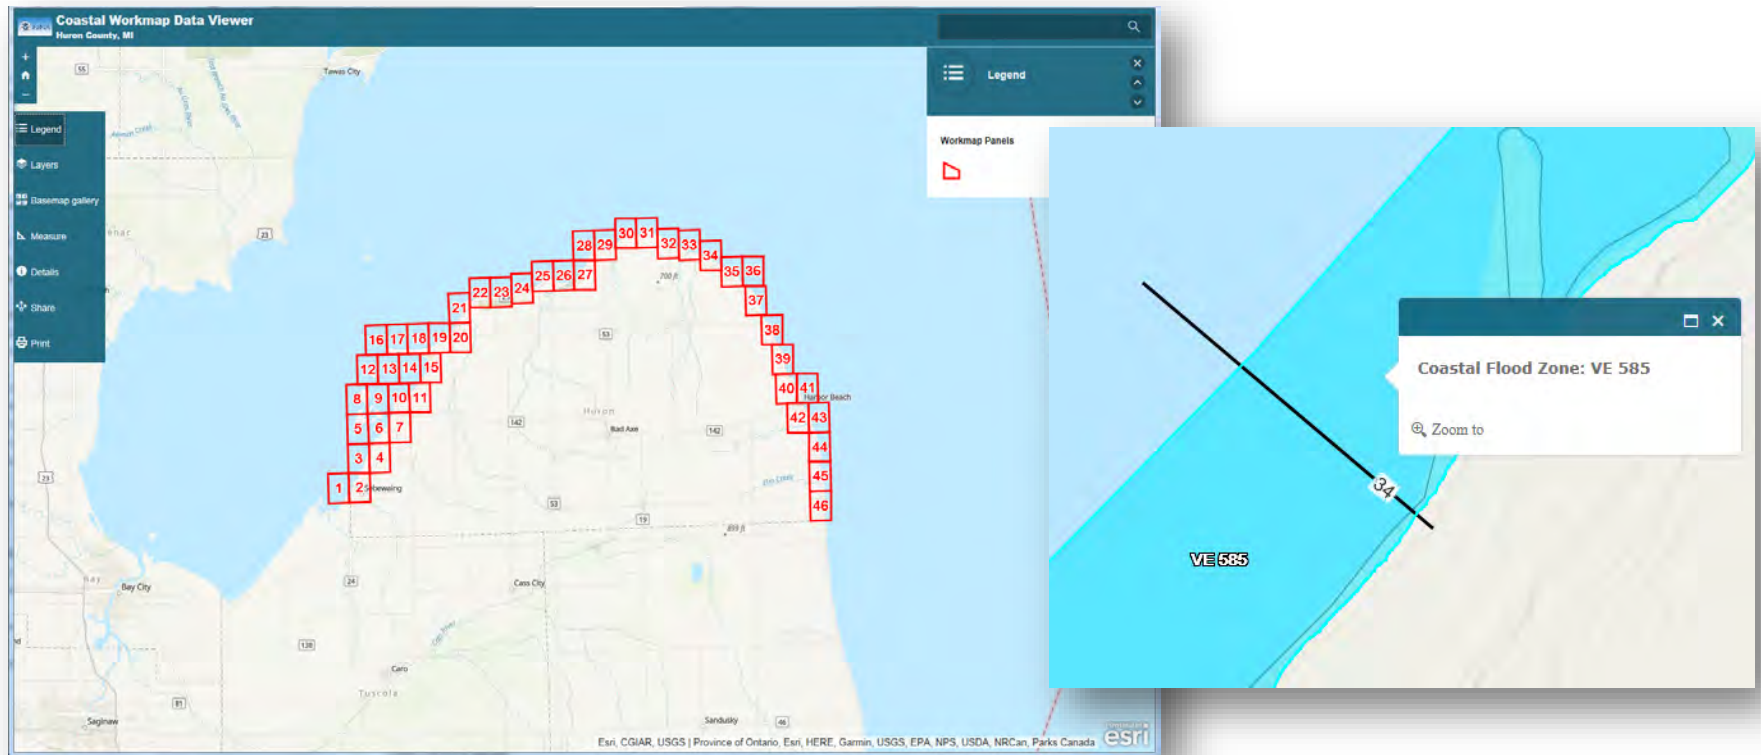


Link to the Huron County Work Map Data Viewer: <https://goo.gl/utfo4D>




FEMA

Work Map Data Viewer

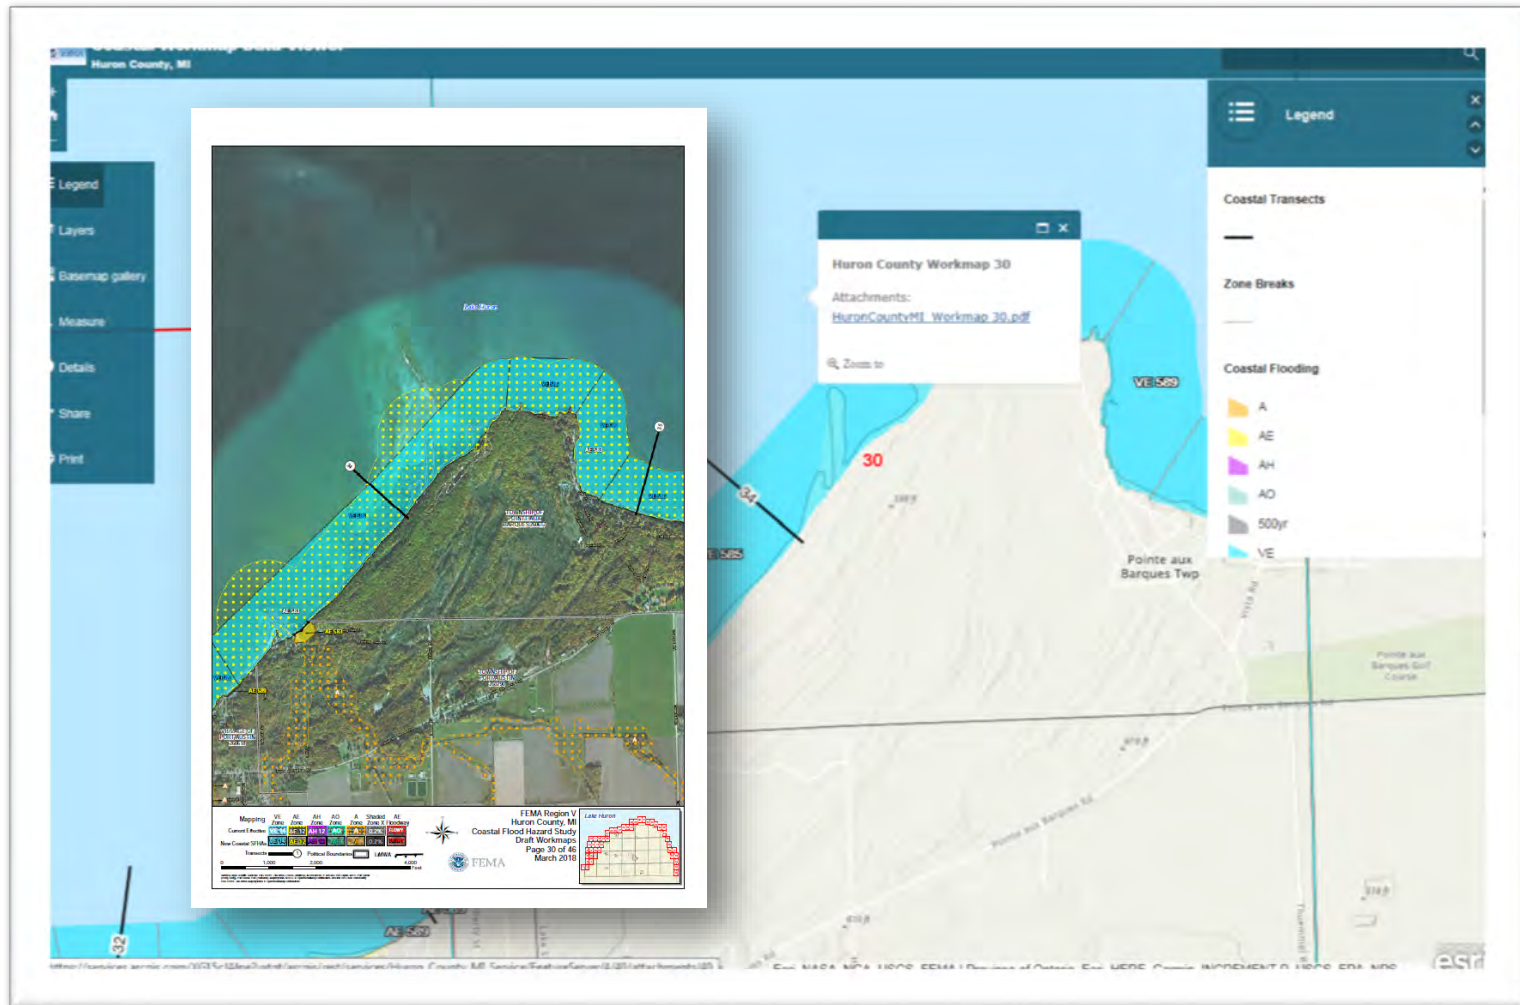


FEMA

Work Map Data Viewer

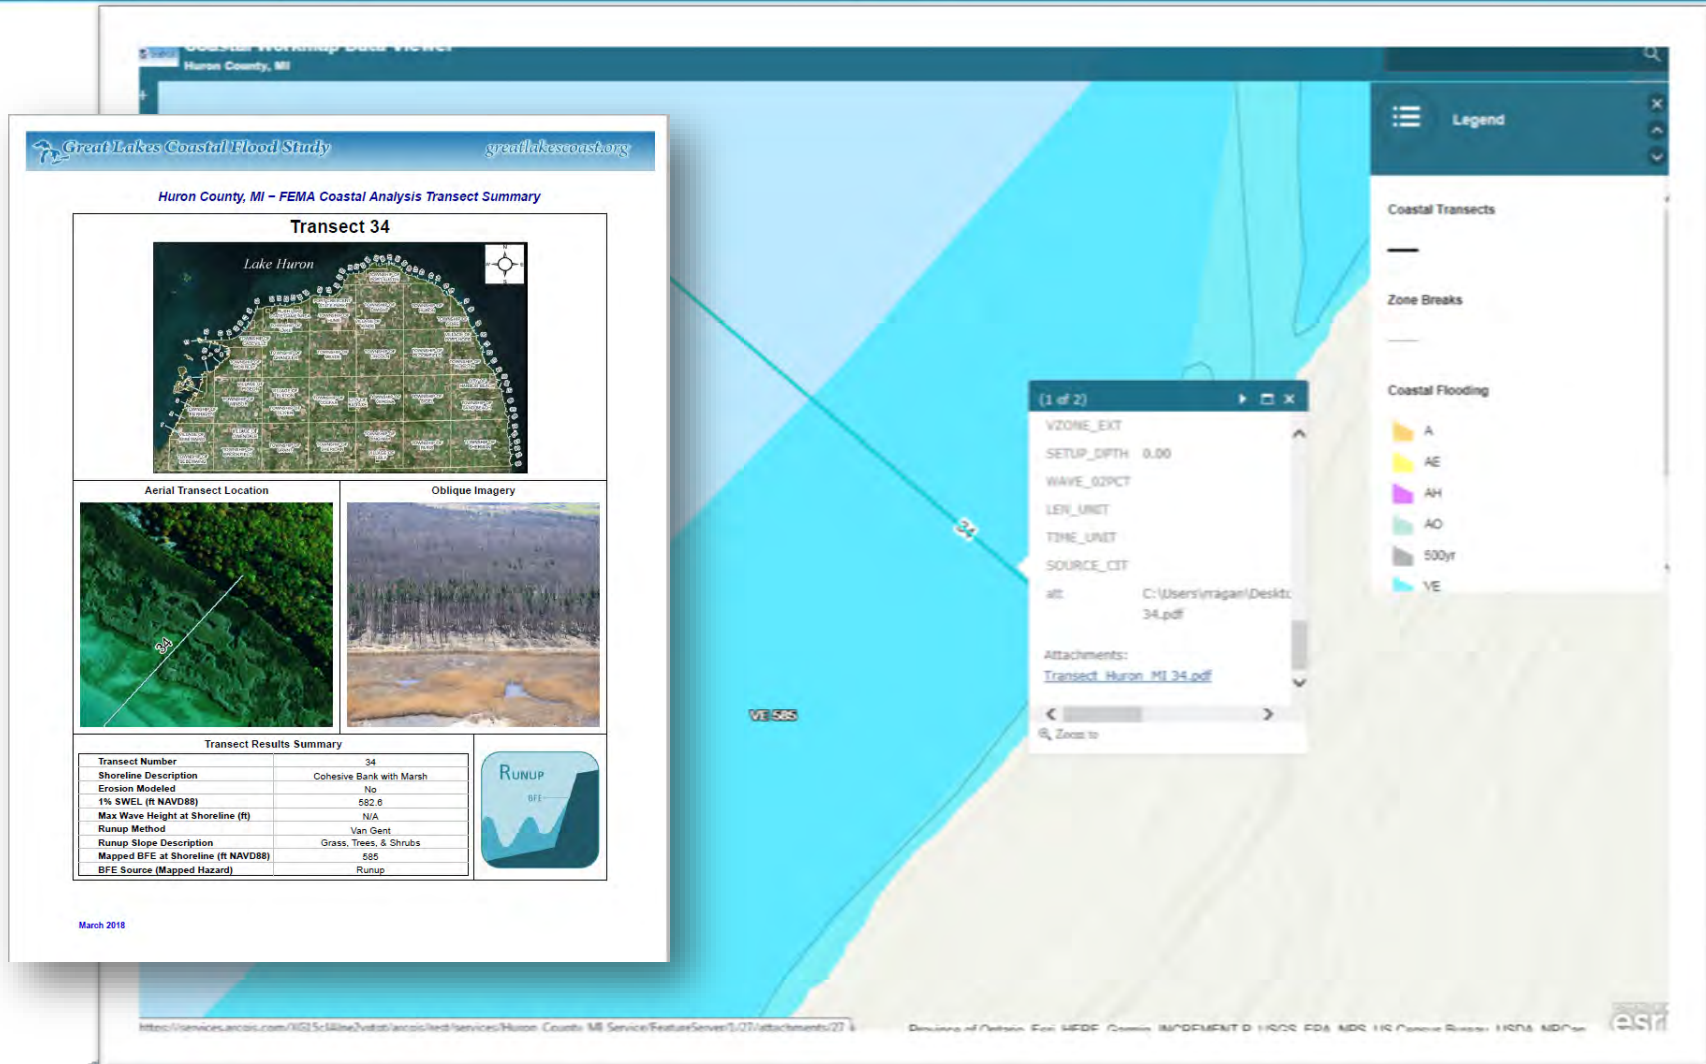

FEMA

Work Map Data Viewer

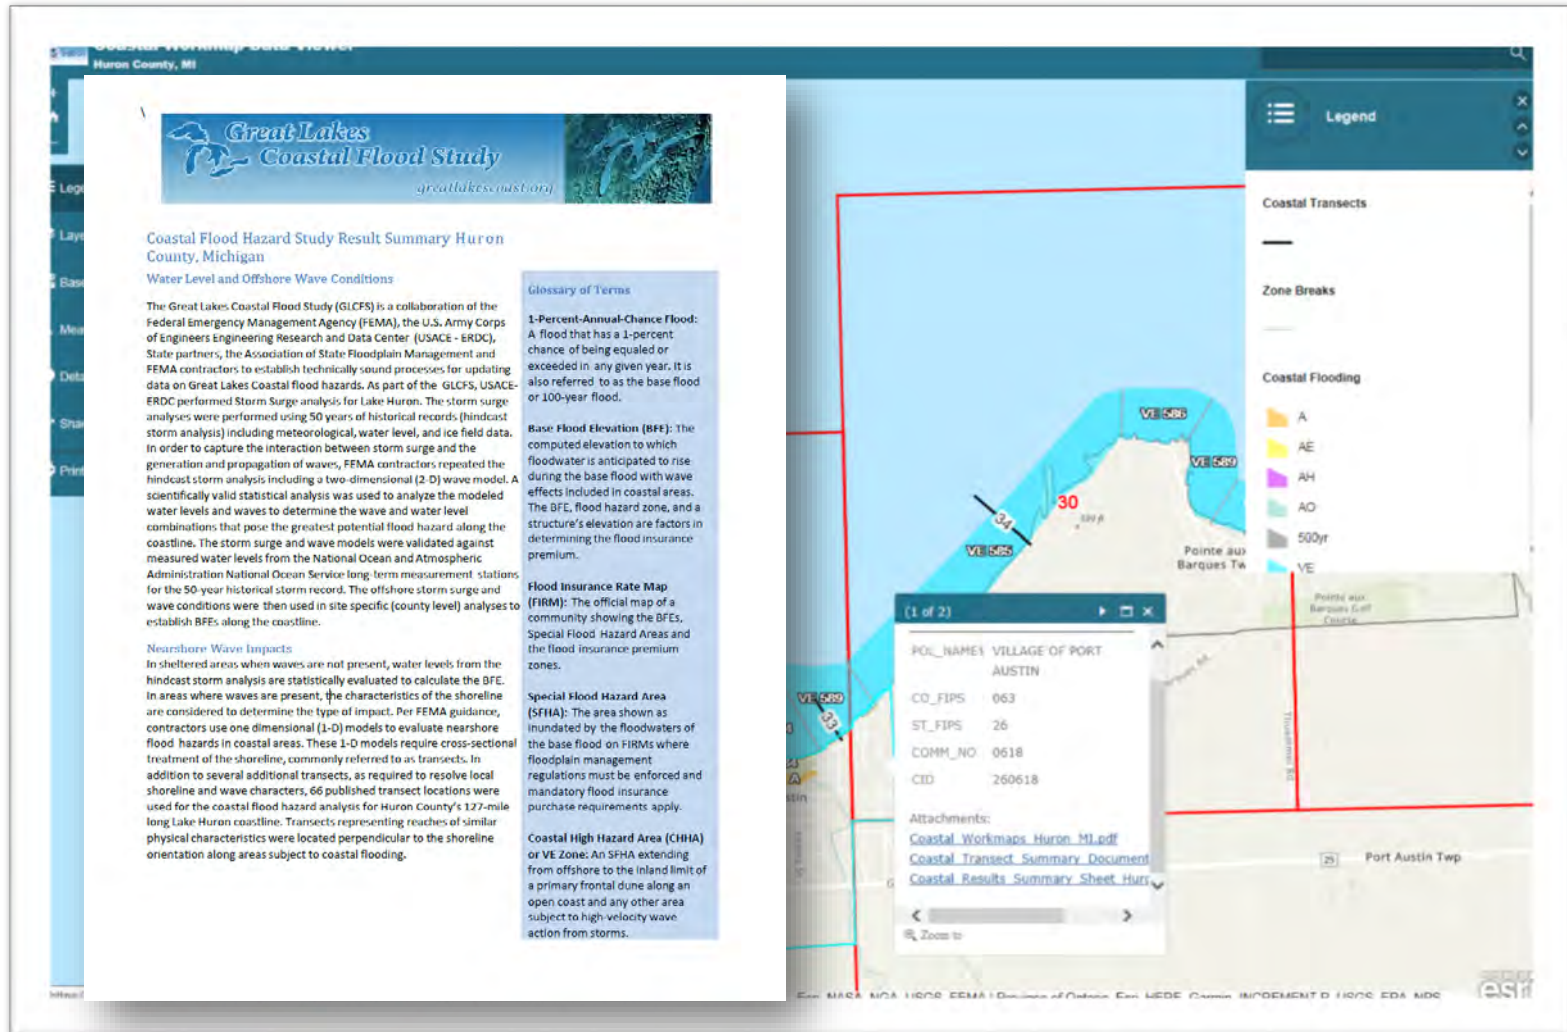

FEMA



Huron County

TECHNICAL OVERVIEW OF STUDY AND MAPPING

Coastal Flood Hazard Modeling Overview


Lake-Wide Variation

Local Variation

Step 1: Offshore Water Level and Wave Modeling

Step 2: Nearshore Wave Setup, Runup & Overtopping

Step 3: Floodplain Mapping

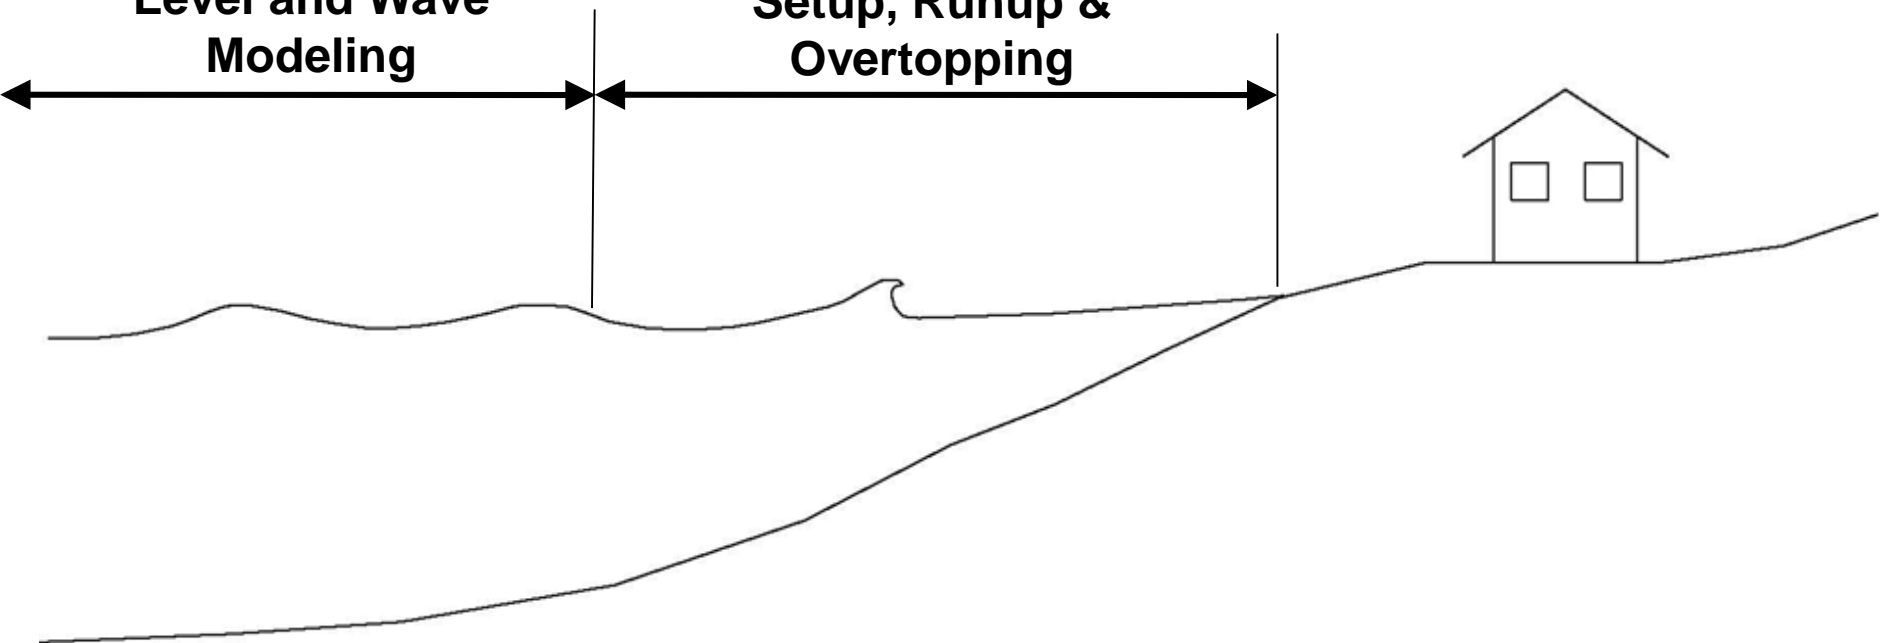


FEMA

Step 1: ADCIRC+SWAN Mesh



► Resolution as fine as 10 m along complex shoreline features including:

- Jetties
- Breakwaters
- Inlets
- Natural Shoals

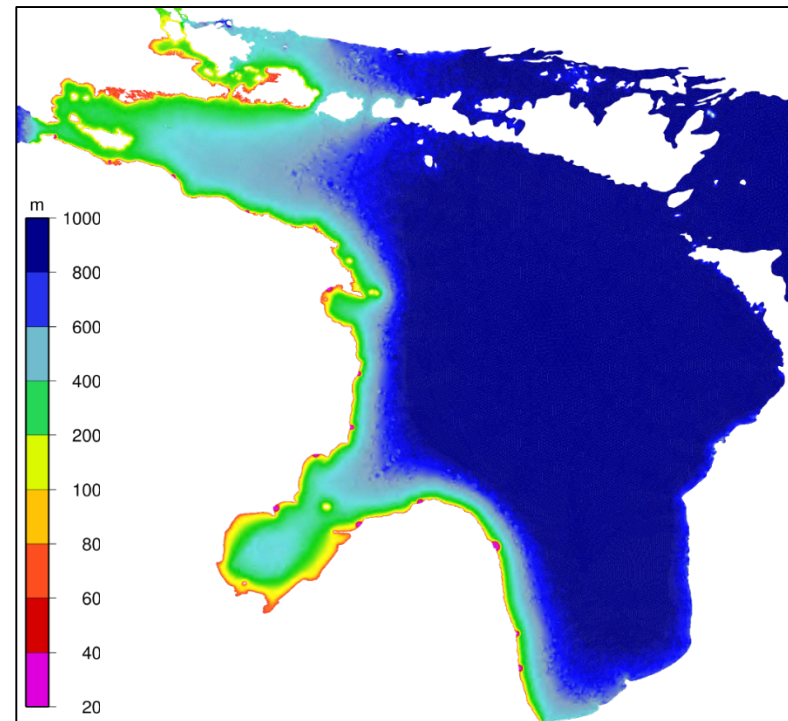


FEMA

Step 1: Run the Models


Baseline

Water Level




Meteorological Forcing

Wind



Pressure




Ice




Physical Setting


Bathymetry

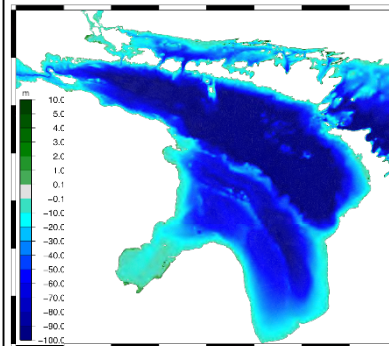

Waves

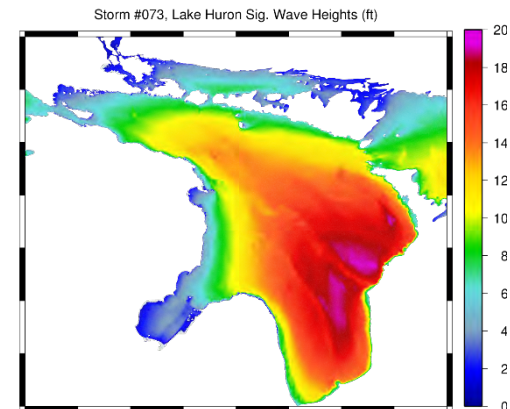

Still Water Elevations

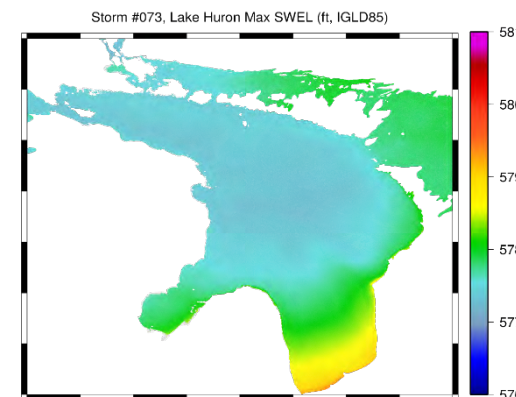


Total of 151 events between 1960-2009




FEMA

Step 1: Lake Levels

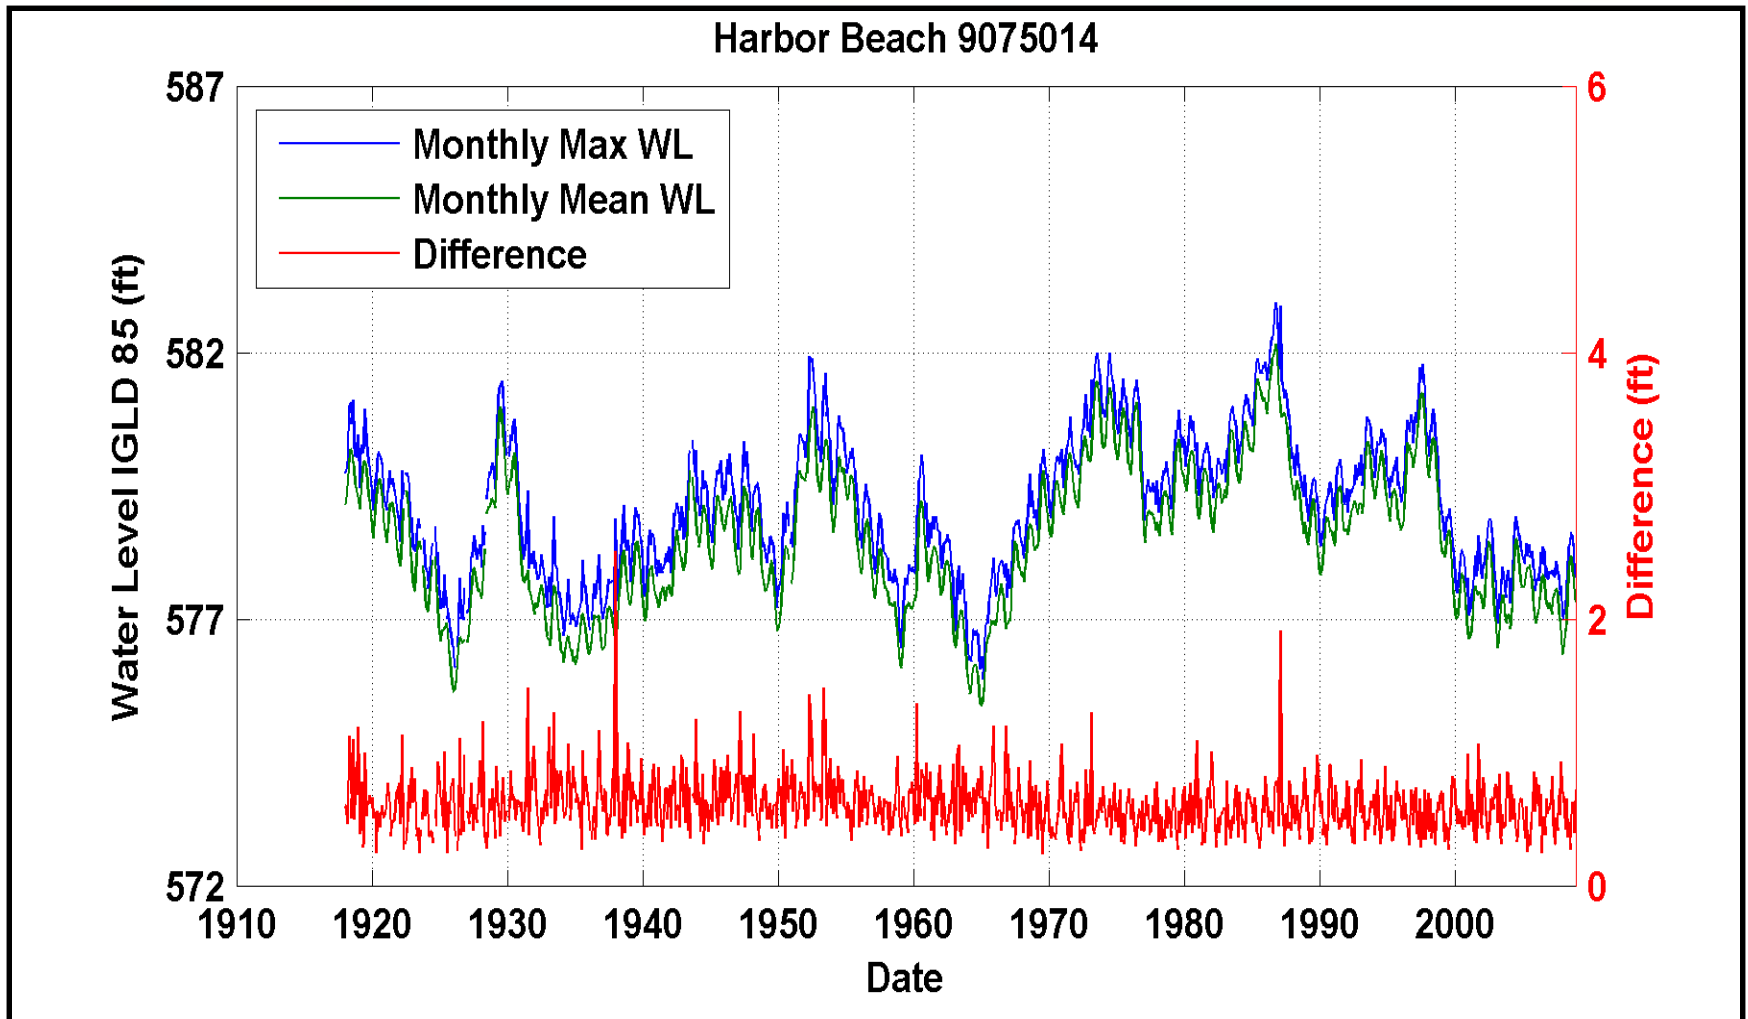


FEMA

Step 1: Lake Levels

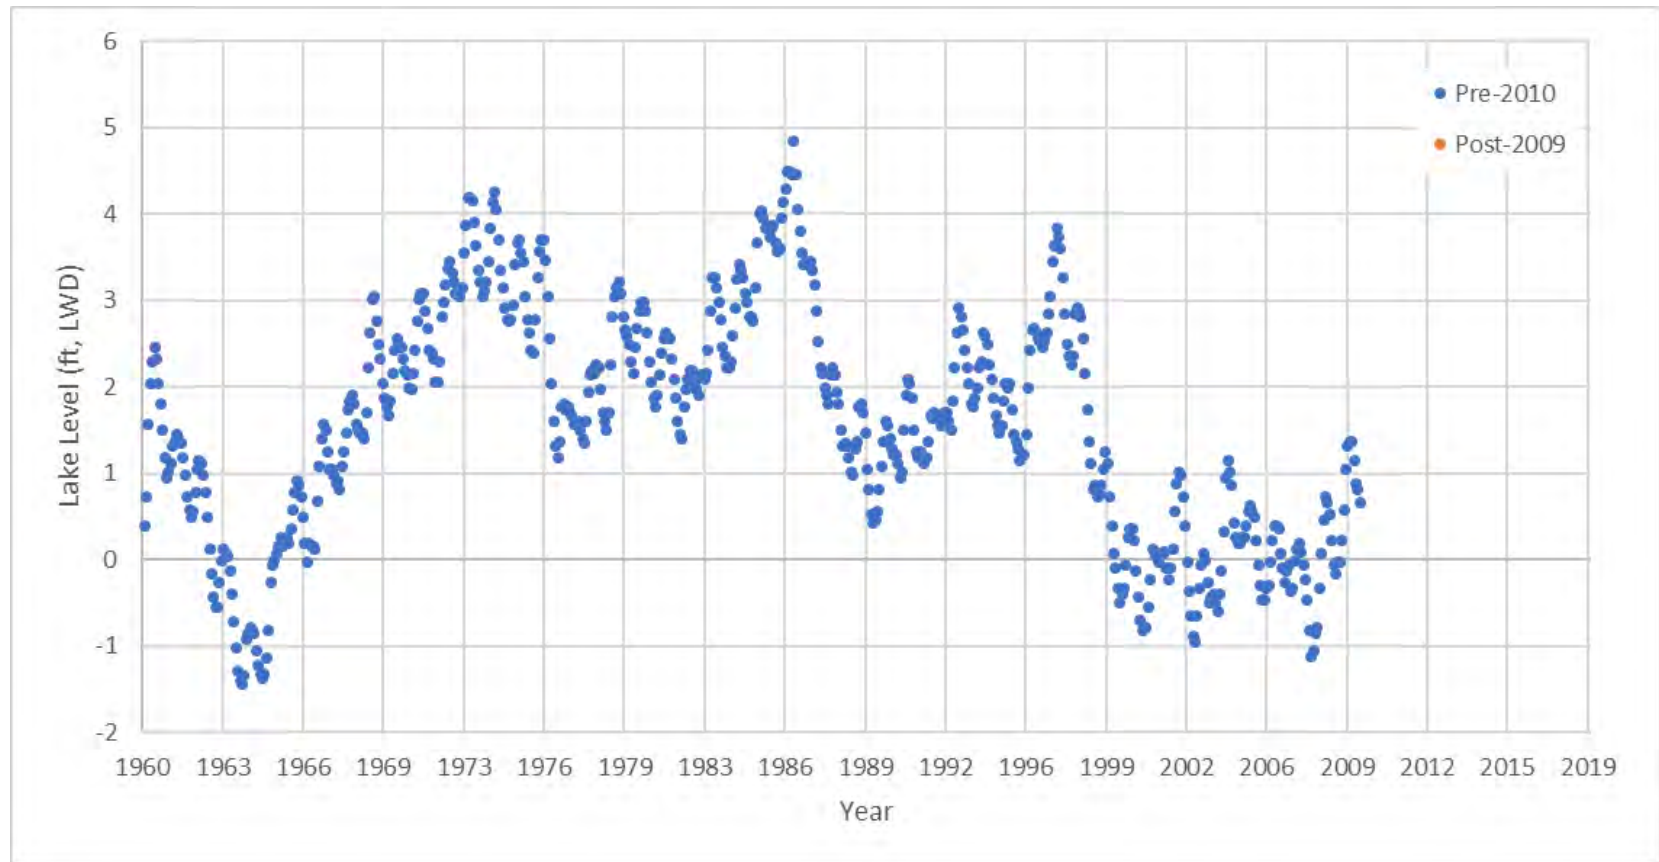

FEMA

Step 1: Lake Levels

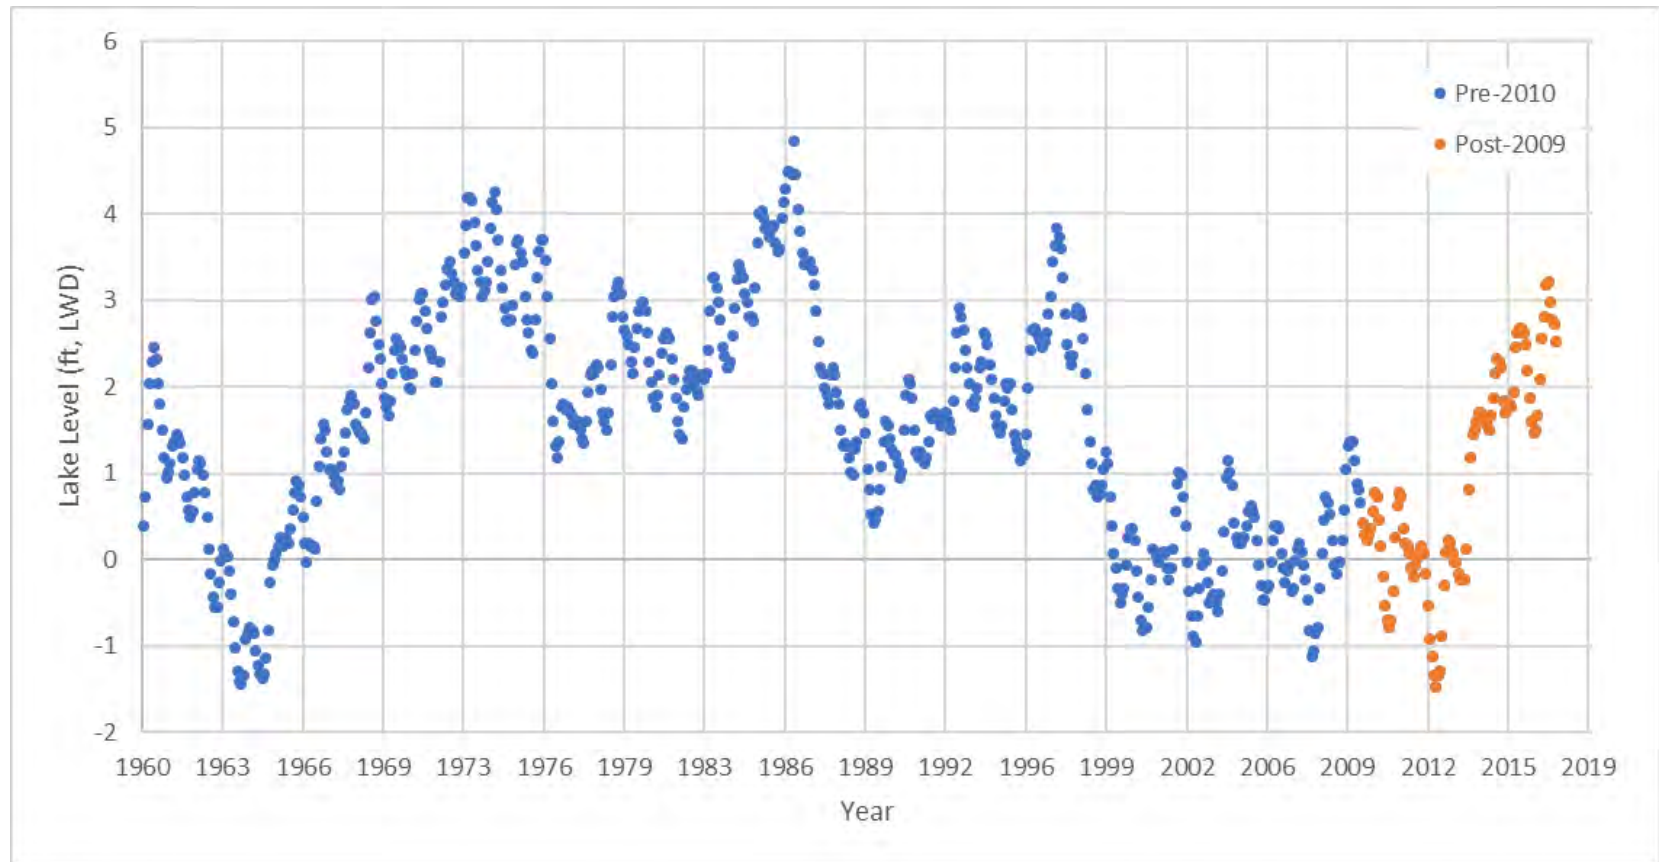

FEMA

Step 1: Model Accuracy Assessment

Water Level Gauge Station		RMS error (m)	Bias (m)
9075014	Harbor Beach	0.054	0.018
9075080	Mackinaw City	0.061	0.011
9075099	De Tour Village	0.051	0.026
9014098	Fort Gratiot	0.106	0.069
9075002	Lakeport	0.072	0.011
9075035	Essexville	0.103	-0.003
9075059	Harrisville	0.054	0.027
Average		0.071	0.023

Wave Buoy Station		RMS error (m)	Bias (m)
45003	North Lake Huron	0.317	-0.024
45008	South Lake Huron	0.310	0.051
Average		0.313	0.014



Step 2: Nearshore Wave-Induced Flood Hazards


Nearshore Wave-Induced Flood Hazards Analysis includes:

- Shoreline classification
- 2-D Wave and Surge Model data extraction
- Wave setup
- Erosion
- Evaluation of coastal structures
- Wave runup
- Wave overtopping
- Overland wave propagation
- Statistical analysis


Along 1-D Transects

Step 2: Transect Analysis Overview


Water Level & Offshore Waves

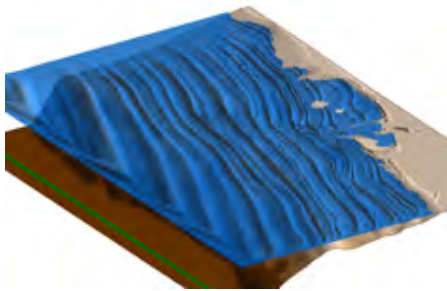

Transect Analysis

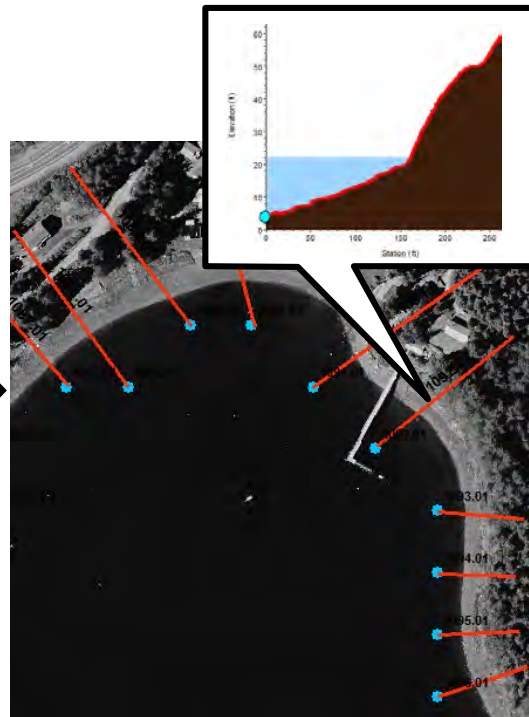

Total Water Level

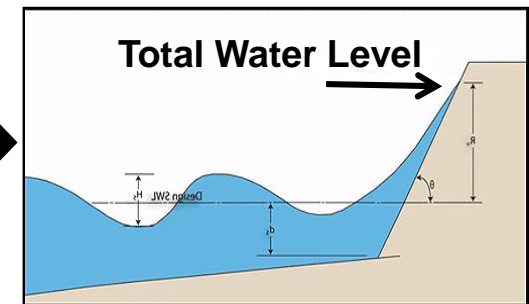

Total Water Level

- Water Level (Surge)
- Waves
- Setup, Runup and Overtopping

Step 2: Transect Layout



- Huron County:
 - 66 Published Transects
 - 276 Analysis Transects
 - 127 Shoreline Miles
- Transects placed at representative shoreline reaches based on:
 - Topography
 - Exposure
 - Shoreline Material
 - Upland Development





FEMA

Step 2: Eroded Transect Profiles

- Erosion analysis applied for sandy beach transects with gradual slopes.
- Eroded profiles are calculated using the USACE CSHORE model for each storm event.
- Influences wave setup, runup, and overtopping by affecting profile slope.

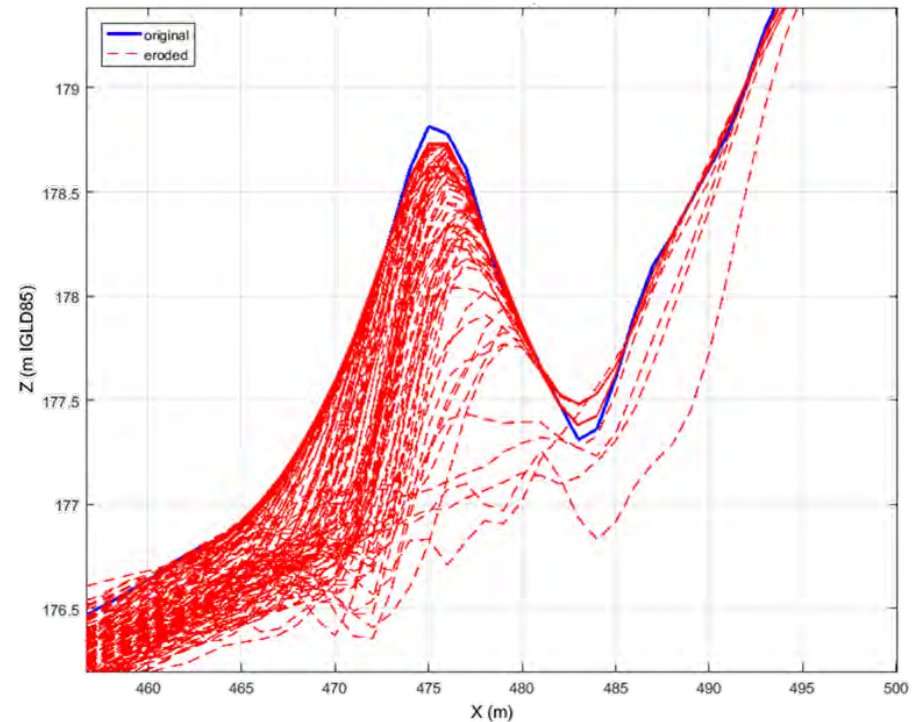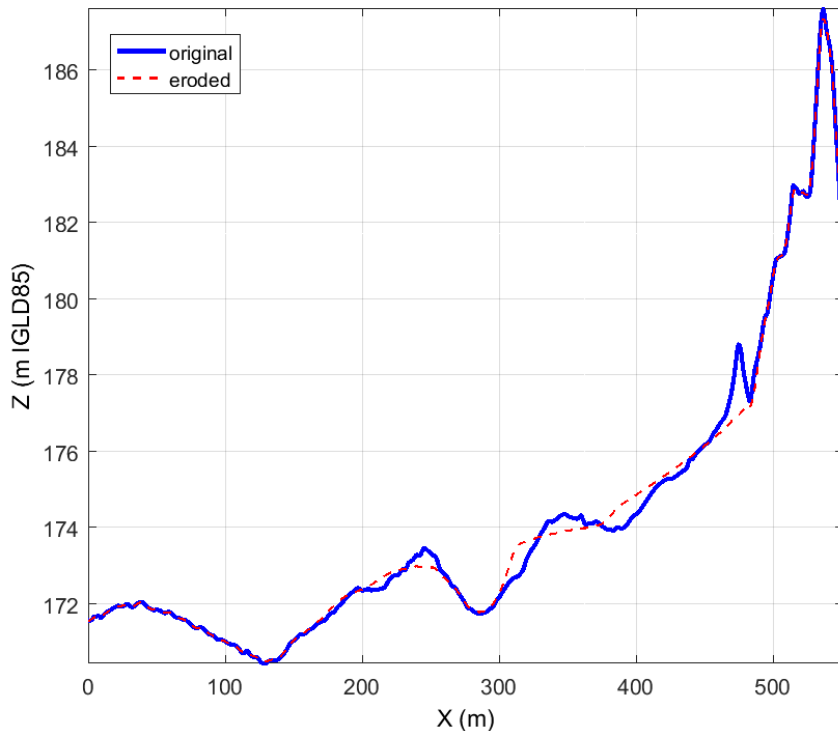


Step 2: Failed Structure Profiles

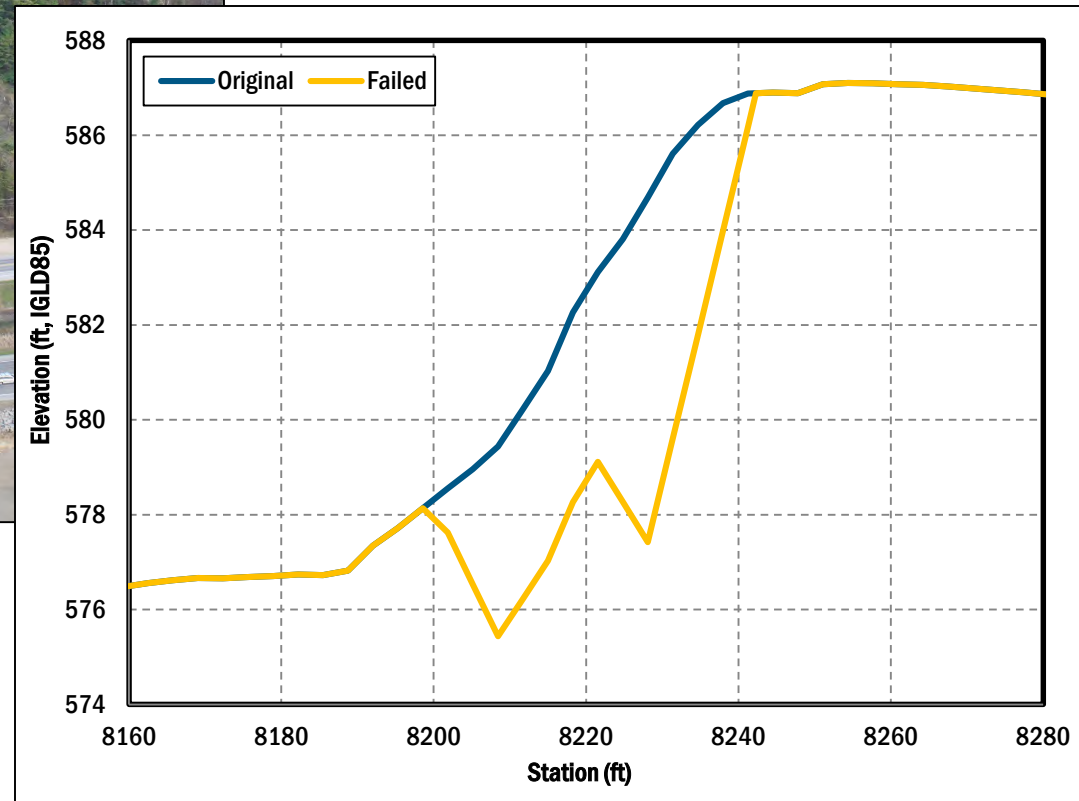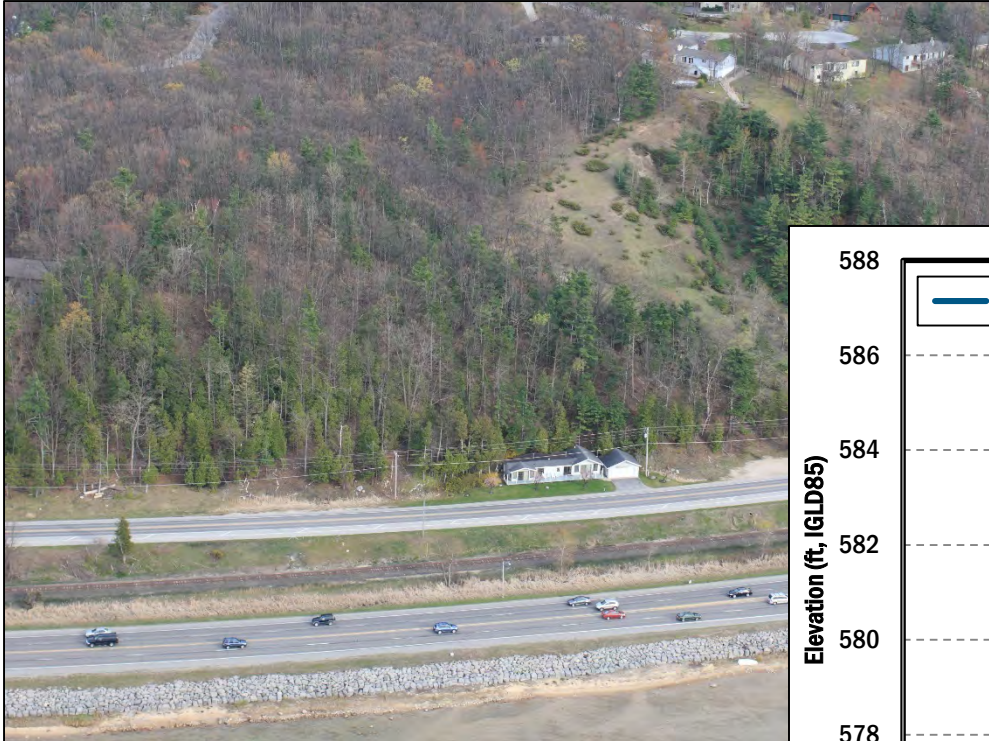

FEMA

Step 2: Transect Analysis: Wave Setup and Runup

- Wave runup is the uprush of water from wave action on a beach or shore barrier such as a steep dune, bluff or coastal structure.
- Runup was calculated for every time step of each of the 150 storm events at each transect for the response-based approach.
- A statistical analysis was performed on the maximum runup results at each transect to obtain the 1-percent-annual-chance runup elevation.

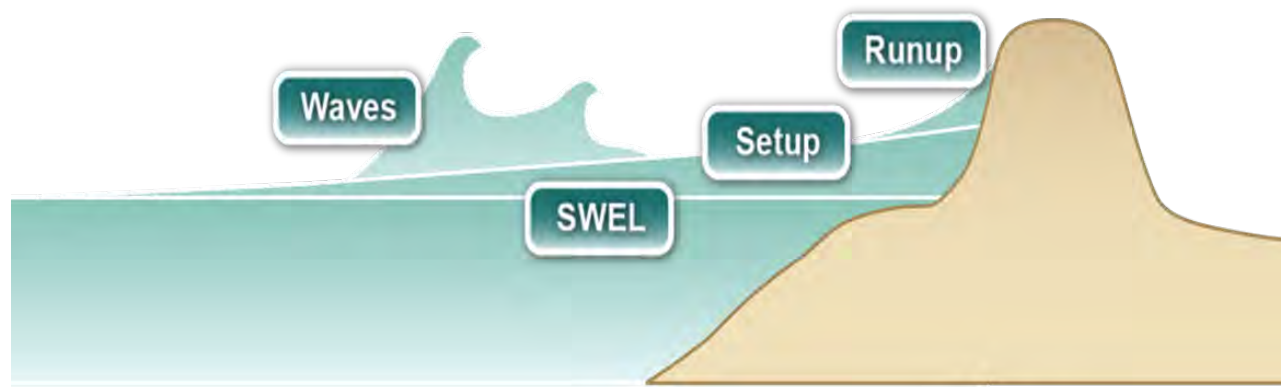

Wave Height
Wave Period
SWEL
Profile Slope


Wave Setup
Wave Runup



FEMA

Response-Based Wave Runup

Runup Method Decision Flow Chart

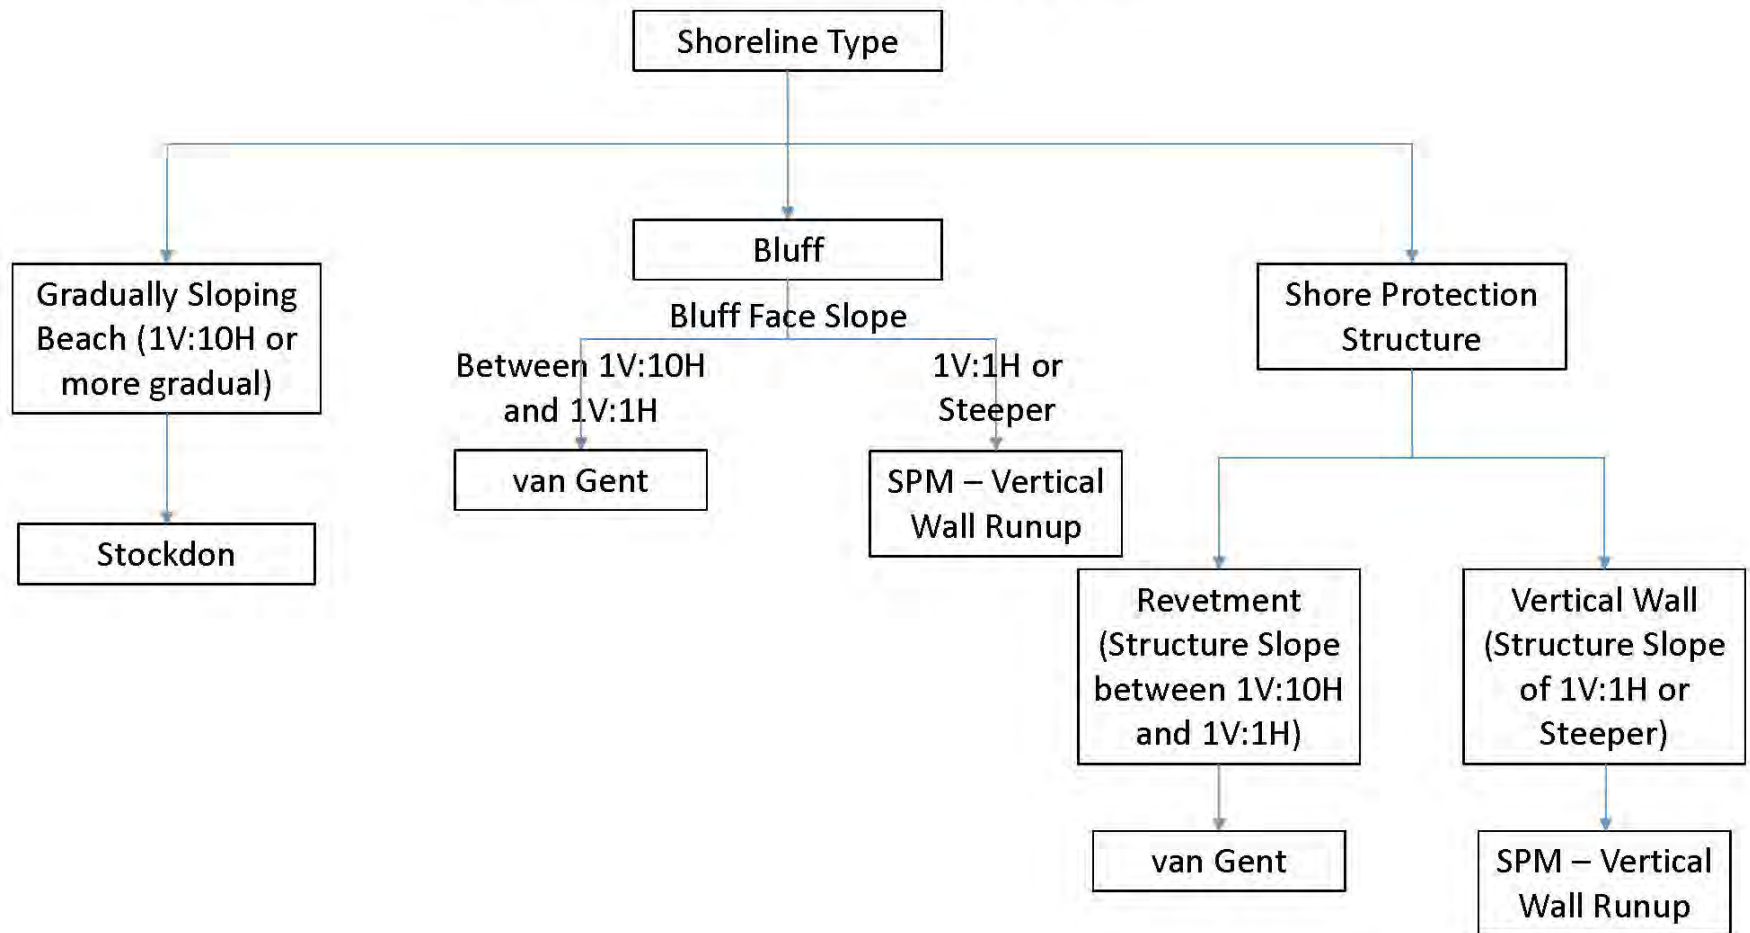

Step 2: Runup



http://www.mlive.com/expo/erry-2018/04/33c5eb88b72690/heres_a_look_at_how_michigan_r.html
<http://machicon-akihabara.info/2017eimage-estuarine-floods.awp>



FEMA

Step 2: Transect Analysis: Wave Overtopping

- If wave runup exceeds the barrier crest elevation, overtopping occurs.
- Overtopping rates are calculated using methods described in the EurOTop Manual
- Overtopping rates determine VE splash zones and AO Zone (sheet flow) depths



Step 2: Wave Overtopping



<https://www.youtube.com/watch?v=2N6SYWuP9p0>

<https://www.youtube.com/watch?v=iLmbBJLBDBs>



FEMA

Step 2: Wave Overtopping – Plateau Method

- ▶ When overtopping occurs, the zone behind the barrier is designated as:
 - AE if landward slope is positive
 - AO if landward slope is negative
 - AH if landward slope is negative and flow cannot drain
- ▶ Inland extent of overtopping mapping generally follows the 1-percent-annual-chance BFE contour
- ▶ Plateau method allows for an inland limit of runup to be calculated as the AE zone extent for gradually sloping upland areas behind a steep barrier

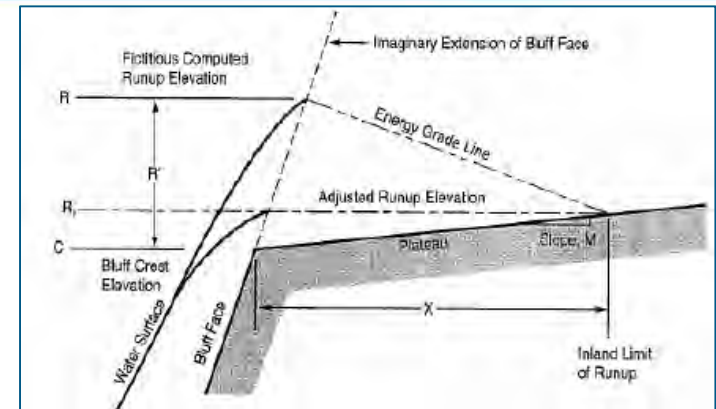


Figure D.3.5-3: Treatment of Runup onto Plateau above Low Bluff

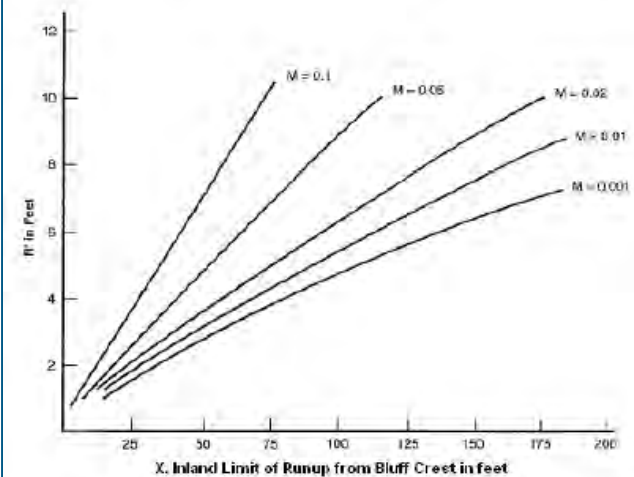





Figure D.3.5-4: Curves for Computation of Runup Inland of Low Bluffs

Step 2: Compute Setup, Runup, and Overtopping



- 151 storms with hourly waves and water levels yields hourly wave setup, runup and overtopping rates
- Hourly Still Water Levels (SWELs)
- Hourly Water Levels + Setup + Runup = Hourly Total Water Levels (TWLs)
- Extract the Peak SWEL and TWL from each storm
- Perform Return Period Analysis on SWEL and TWL
- 1-percent-annual-chance TWEL is used to define the Base Flood Elevation (BFE)

Step 2: Return Period Analysis


Transect SAN05: Initial TWL Analysis # Events: 151

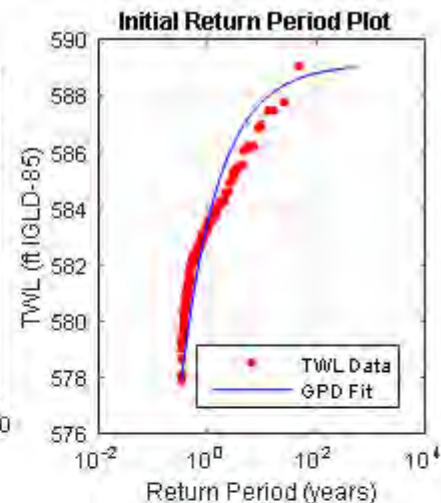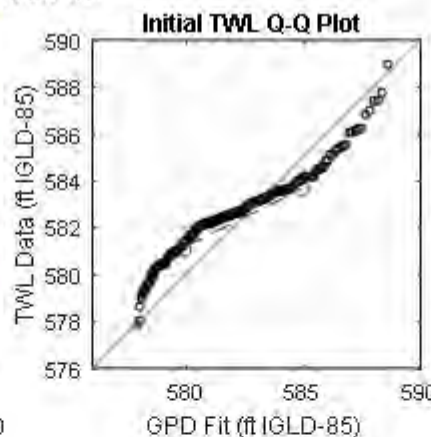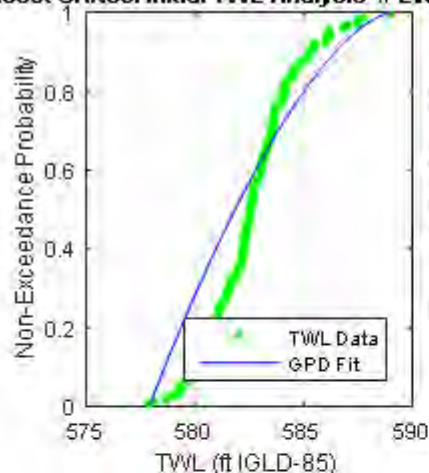

Transect SAN05: Optimized TWL Analysis # Events: 95

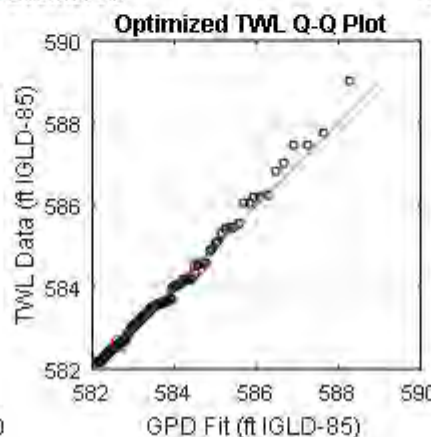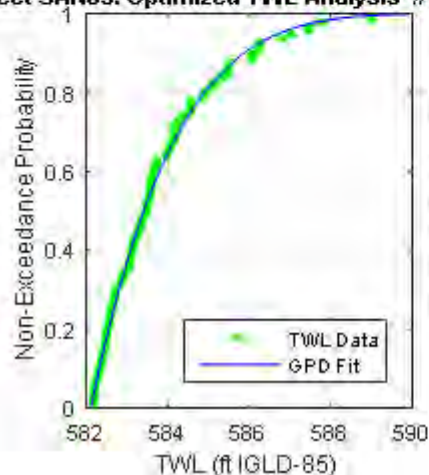

Optimized Return Period Plot: Quantiles 25-75

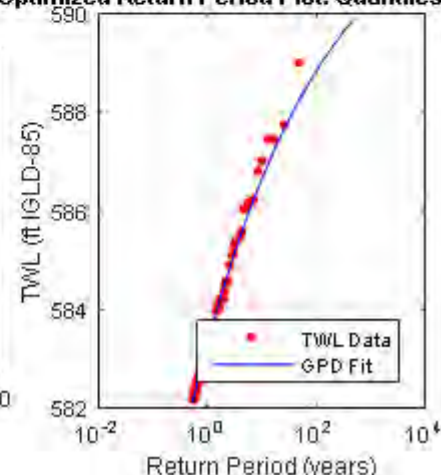

FEMA

Step 2: Overland Wave Propagation

- Waves will propagate overland at areas where 1-percent still water level inundates far inland
- Overland wave propagation was modeled using event-based approach with synthetic storms determined by JPM analysis
- WHAFIS simulates inland wave propagation, dissipation due to obstructions, and wave regeneration


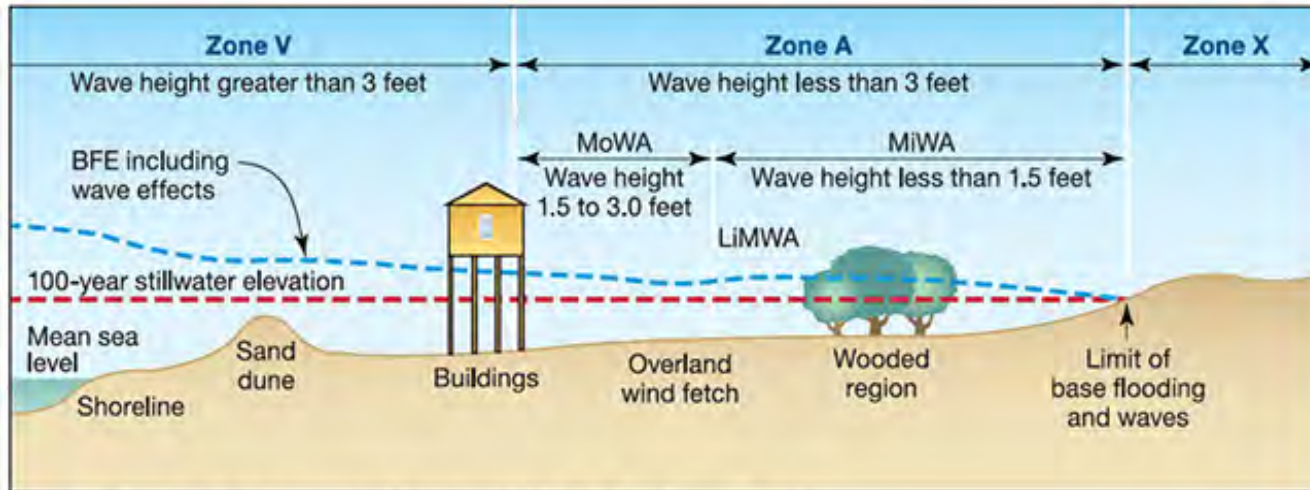


Figure 2-4. Wave height transect showing LiMWA, MoWA, and MiWA



Step 2: JPM Analysis

- Joint Probability Method looks at the joint probability between peak wave height and water level of all historical storm events
- Five 1-percent events were determined corresponding to:
 - ❖ Max Hs and expected SWEL
 - ❖ Max SWEL and expected Hs
 - ❖ Intermediate SWEL and Hs
 - ❖ 1% SWEL and conditional Hs
 - ❖ 1% Hs and conditional SWEL

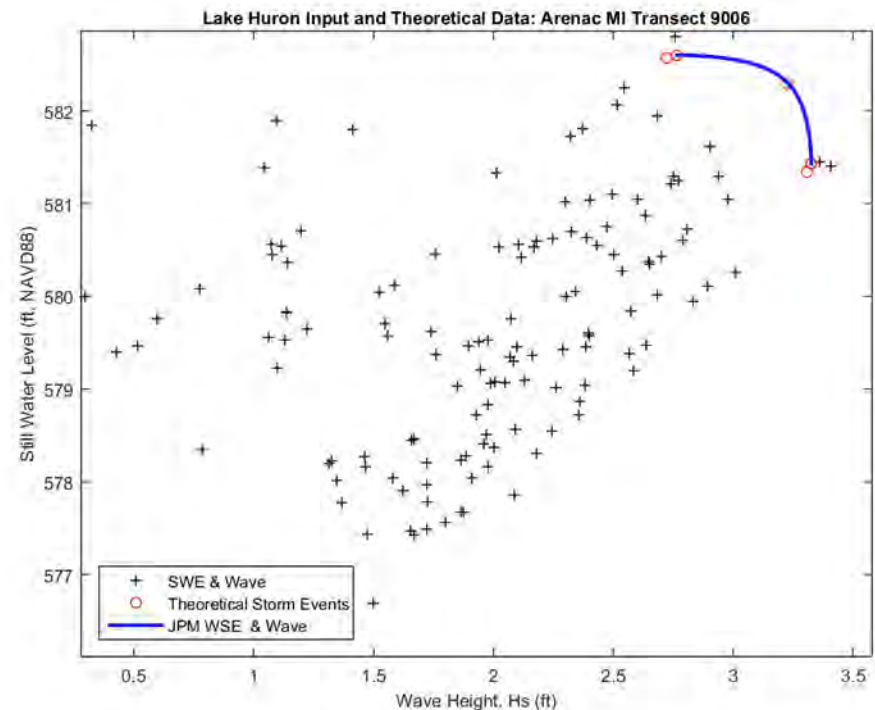


FEMA

Step 2: WHAFIS Modeling

- Physical Setup: Transect profile with WHAFIS Carding

Card	Description
OF, IF	Overwater Fetch, Inland Fetch with 40 mi/hr wind associated with 1% event for wave generation
VH, VE	Marsh Grass, Rigid Tree line for wave dissipation
DU, BU	Obstruction due to Barriers, Building for wave dissipation

- Forcing Condition: Apply the maximum TSWL (SWEL + Wave Setup) and H_s from the 5 JPM storm events
- Model Output: Cross-shore wave height profile

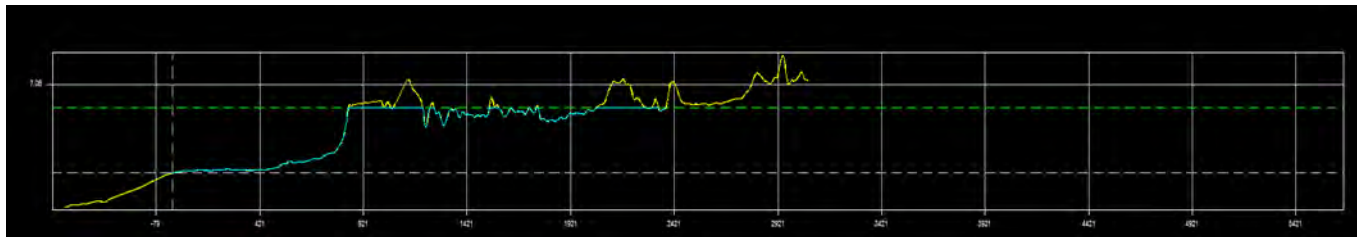


Step 3: Mapping

Coastal Flood Hazard Zones

- **Zone VE:**
 - Represents coastal high hazard areas
 - Wave heights ≥ 3 ft
 - Wave runup ≥ 3 ft above ground elevation
 - BFEs are assigned
- **Zone AE:**
 - Inundation areas
 - Wave heights < 3 ft
 - Wave runup < 3 ft above ground elevation
 - BFEs are assigned
- **Zone AH:**
 - Ponding areas with 1-3 ft depths
 - BFEs are assigned

- **Zone A0:**
 - Applied in areas of sheet-flow shallow flooding
 - Designated with depths of 1-, 2-, or 3-ft
- **Zone Shaded-X:**
 - Areas impacted by the 0.2-percent-annual-chance event

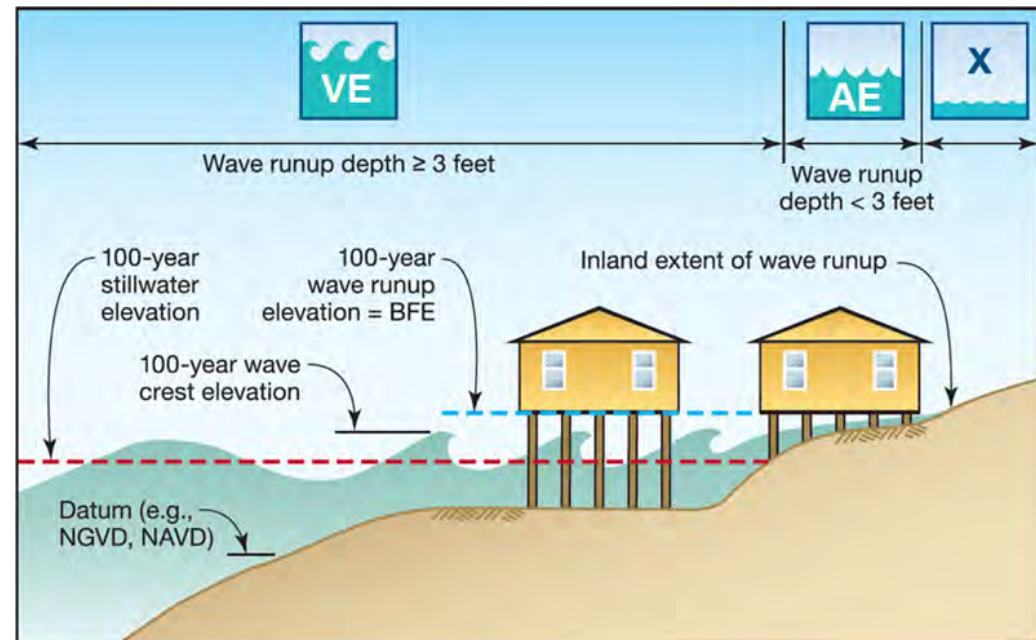

Step 3: Zone Breaks

- Zone breaks are placed along the coast where the characteristics of the shoreline transition from one shore type to another
- Define the extents of each representative shoreline reach



FEMA

Step 3: Runup VE Zones

- Intact transects
 - VE zone mapped to elevation associated with TWL or structure crest elevation
- Failed transects (coastal structures)
 - VE zone mapped to station along the profile associated with TWL
 - Elevation may not match topography since mapping extent is associated with failed structure elevation
- Eroded profiles
 - VE zone mapped to station along the profile associated with TWL
 - Elevation may not match topography since mapping extent is associated with the eroded profile elevation

Step 3: Overtopping Zones

AO Zones

- Applied in areas of shallow flooding, usually sheet flow on sloping terrain
- Flood depth determined based on overtopping rate

AH Zones

- Applied in areas of ponding




\bar{Q} Order of Magnitude	Flood insurance risk zone Behind Barrier
<0.0001 cfs/ft	Zone X
0.0001-0.01 cfs/ft	Zone AO (1 foot depth) or Zone AE with BFE
0.01-0.1 cfs/ft	Zone AO (2 foot depth) or Zone AE with BFE
0.1-1.0 cfs/ft	Zone AO (3 foot depth) or Zone AE with BFE
>1.0 cfs/ft*	30-foot width ⁺ of Zone VE (elevation 3 feet above barrier crest), landward Zone AO (3 foot depth) or Zone AE with BFE




FEMA

Step 3: Overland Wave Propagation

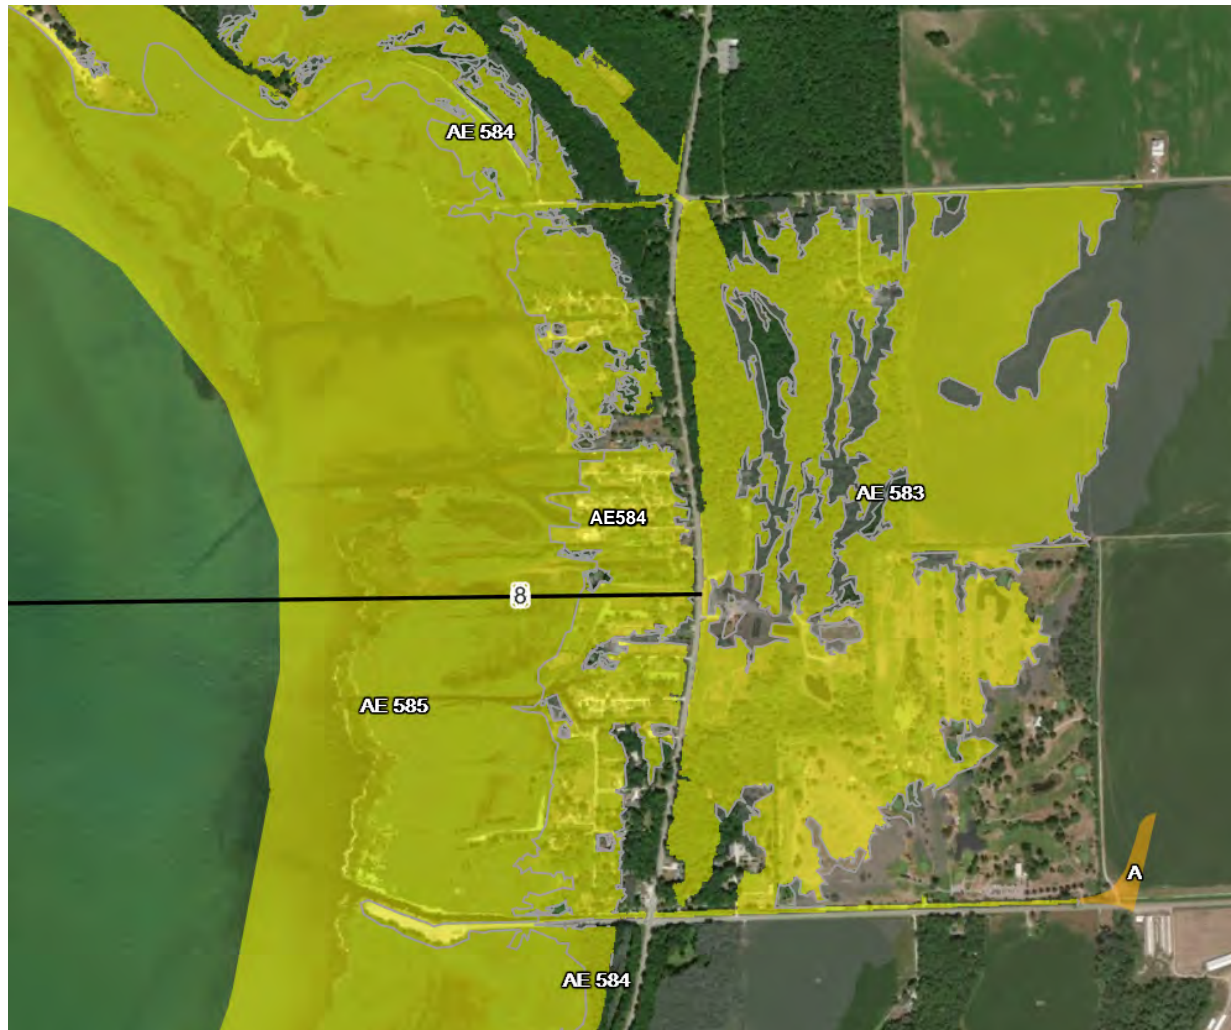

FEMA

Step 3: SWEL Inundation

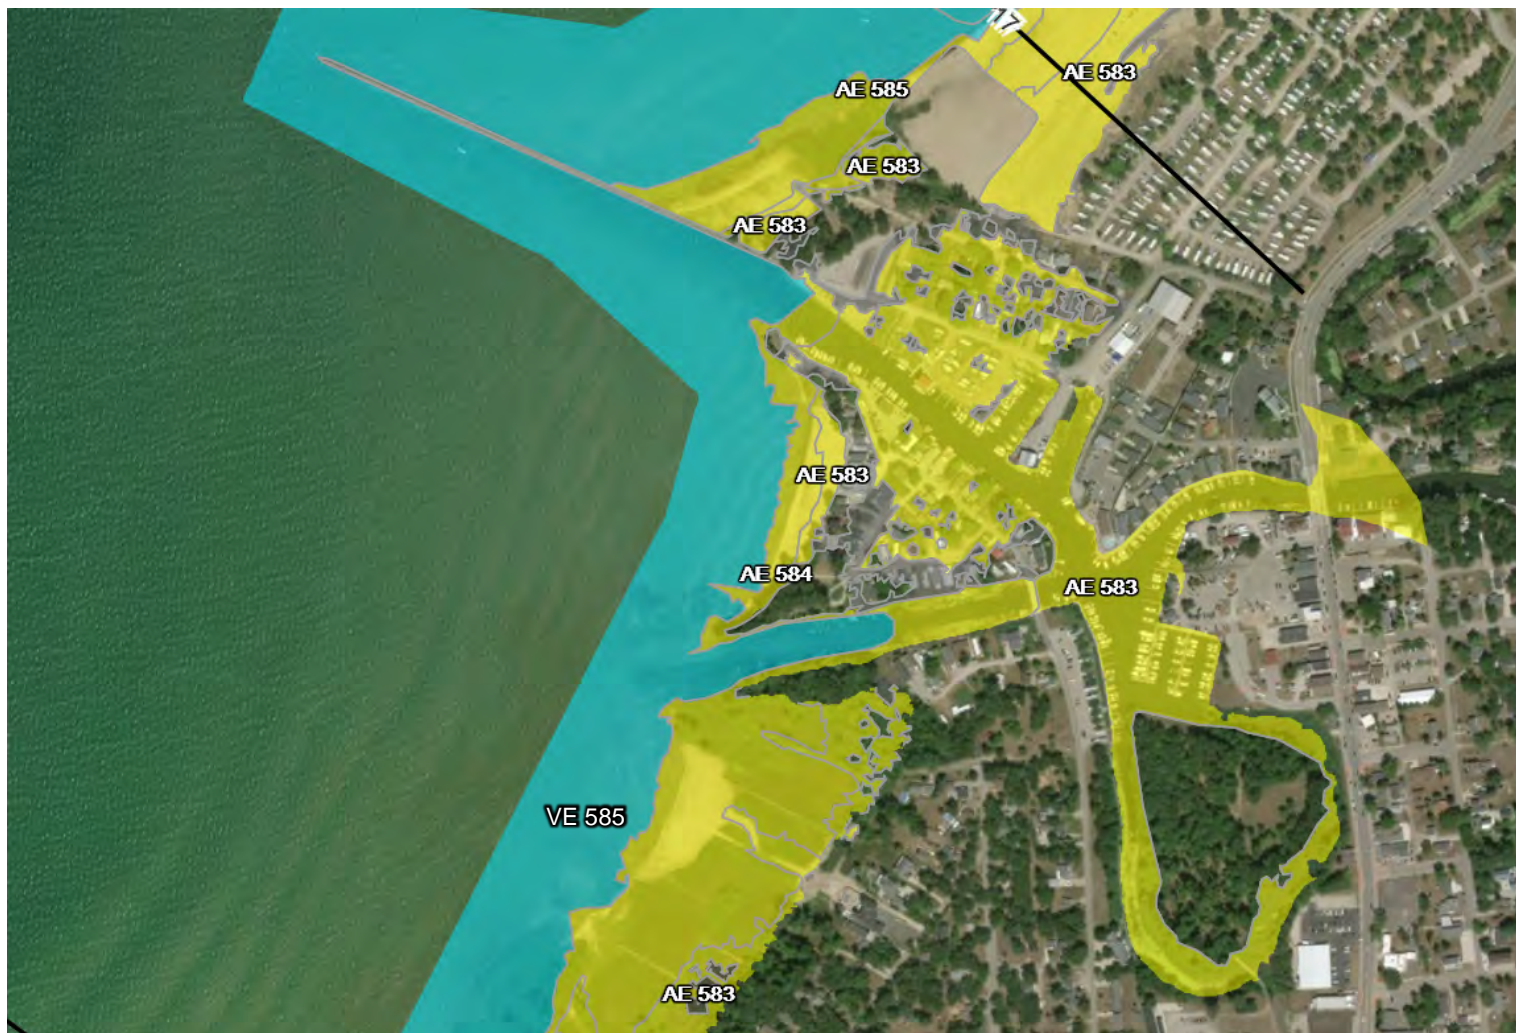

FEMA

Draft Work Map vs FIS/FIRM

Huron County, MI Workmap

Not a Regulatory Product



Huron County, MI Effective FIRM (shown as FIRMette from FEMA Map Service Center)





Huron County


FEMA FLOODPLAIN MANAGEMENT

V-zone Floodplain management : 44 CFR 60.3(e)

The community must require that all new construction and substantial improvements have the lowest horizontal structural member of the lowest floor elevated to or above the base flood level,

... with the space below the lowest floor either free of obstruction or constructed with non-supporting breakaway walls ...

Lowest horizontal structural member

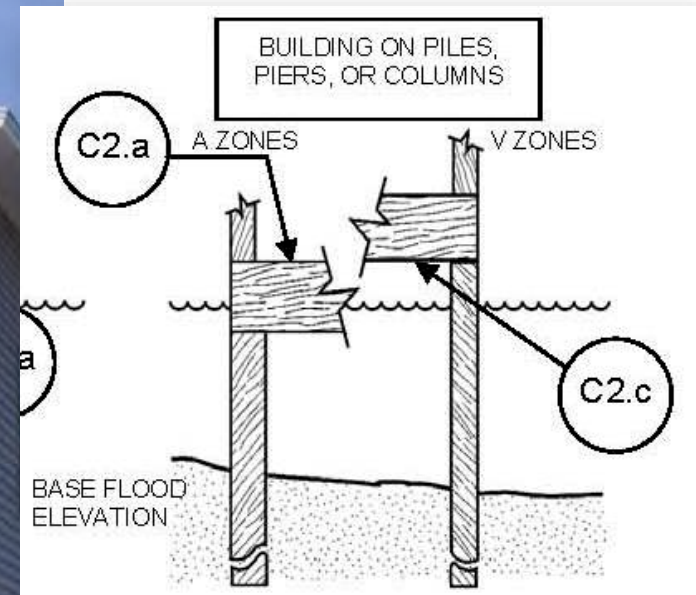


FEMA

Other key points in Zone VE:


- ▶ **NO USE OF FILL as structural support**
- ▶ **Elevated portion of the building and piling/column foundation must be designed to withstand water and wind loads acting simultaneously under base flood conditions**

Online Resources

Great Lakes Coastal Resilience Planning:
<http://www.greatlakesresilience.org/>

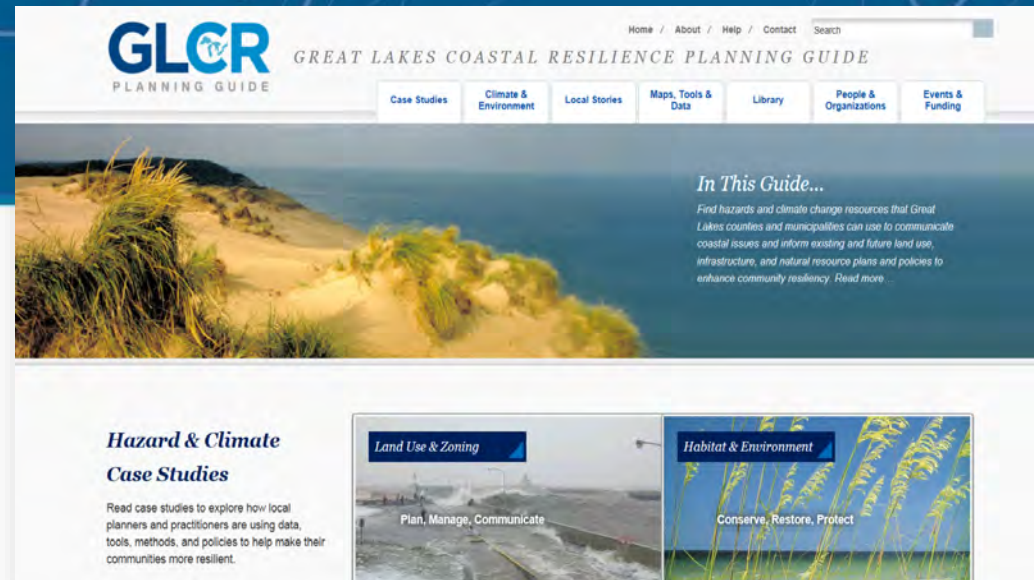

High resolution oblique aerial images
<http://greatlakes.erdcdren.mil/>

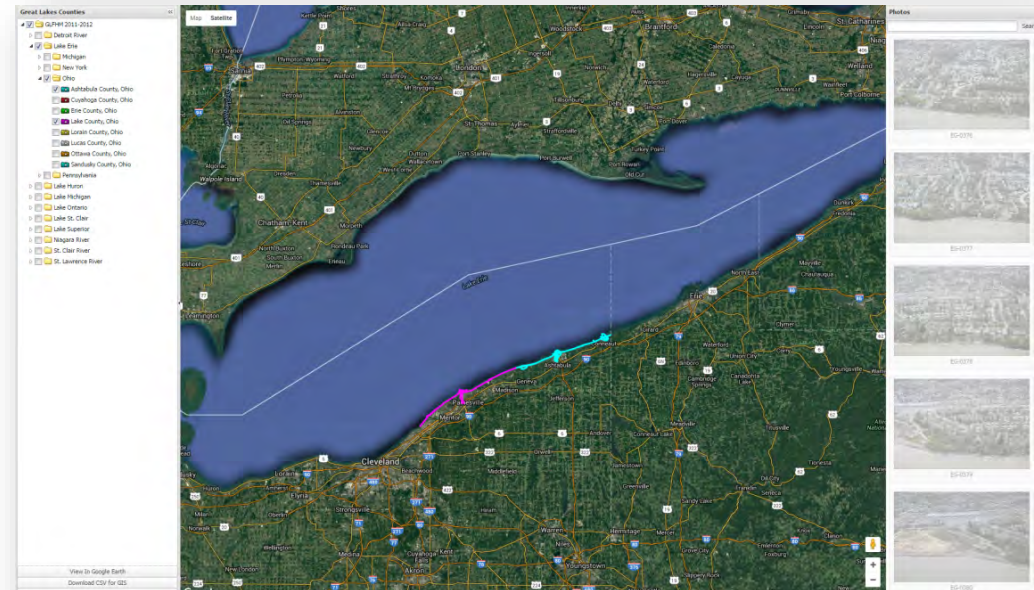

FEMA



Huron County

NEXT STEPS

Next Steps

60 day review and comment period ends May 27, 2018.

FEMA's next steps:

1

Inventory all comments
received

2

Evaluate and
incorporate comments
and data as appropriate

3

Move studies into the
NFIP regulatory process
(developing FIRMs)



FEMA

Comments

Send comments via email to matt.bauer@stantec.com or mail to:

Great Lakes Coastal Flood Study
Comment Repository
c/o Stantec
Attn: Matt Bauer
6110 Frost Place
Laurel, MD 20707

Include county, community, map panel number, description of area (screenshots or drawings are very helpful), detailed comment, and contact information

- ▶ You will receive acknowledgement of receipt of your comment within 3 business days
- ▶ Within 3 weeks, FEMA's response will indicate if enough technical justification was provided to necessitate a map change
- ▶ If you are not satisfied with a comment response on technical grounds, consider using the appeal process during Preliminary FIRM rollout

FEMA Contacts

KEN HINTERLONG

Senior Engineer, Risk Analysis

FEMA Region 5

312-408-5529

ken.hinterlong@fema.dhs.gov

COMMENT REPOSITORY:

Send comments via email to

matt.bauer@stantec.com

or mail to:

**Great Lakes Coastal Flood Study
Comment Repository**

c/o Stantec

Attn: Matt Bauer

6110 Frost Place

Laurel, MD 20707



FEMA

Questions?



FEMA

Thank you for your participation!



FEMA